

Mono Solar Modules

www.cnpv solar.com



HSSP-T60X10/FS

450~470W




Full Screen PV Module

No Dust and Dirt on the Surface Increase Power Generation

Quality Guarantee

12-year → Material & technology warranty

25-year → Linear power output warranty

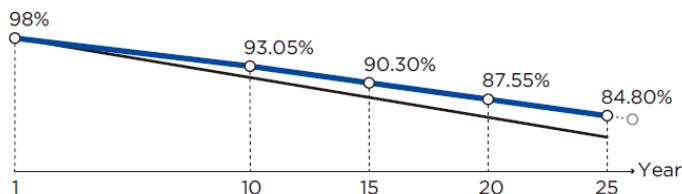

■ Henergy Solar Linear power output guarantee Standard
Linear power output guarantee

Comprehensive Products & System Certificates



IEC 61215 / IEC 61730 / CE / FIDE / INMETRO
ISO 45001: 2018 International standards for occupational health & safety
ISO 14001: 2015 Standards for environmental management system
ISO 9001: 2015/Quality management system

Low current,
increase power generation
1/3 design, lower current and lower loss

Increase power generation by 6.15%+
Panel is capable to decrease power generation loss caused by
Dust, reduce the hot spot risk.


Curved Surface 128° R Angle Reduce holding pressure by 75%+
Curved Frame with ergonomic Design, optimized Delivery and Installation Experience.

Revolutionary Packaging Tech no logy
Using excellent frame packaging technology, Strong Adhesion, Durable in Use.

Excellent mechanical load capacity Certified by
Dust-Sand, Salt-Mist, Ammonia etc. weather resistance tests
and enhanced mechanical load: wind load (2400 Pa) and snow load (5400 Pa).

450W~470W**Mechanical Specification**

Cable	4.0mm ² , 300/400mm in length,
(Including connector)	length can be customized
No.of Cells	180 (6x30)
Glass	3.2mm High Transmission, Antireflection Coating
Junction box	IP68, 3 Bypass Diodes
Connector	MC4 Compatible
Weight	23.5kg
Cells Type	Mono 182x60.7mm
Dimension (LxWxT)	1903x1134x30mm
Packing	34pcs/pallet, 816pcs/40HQ

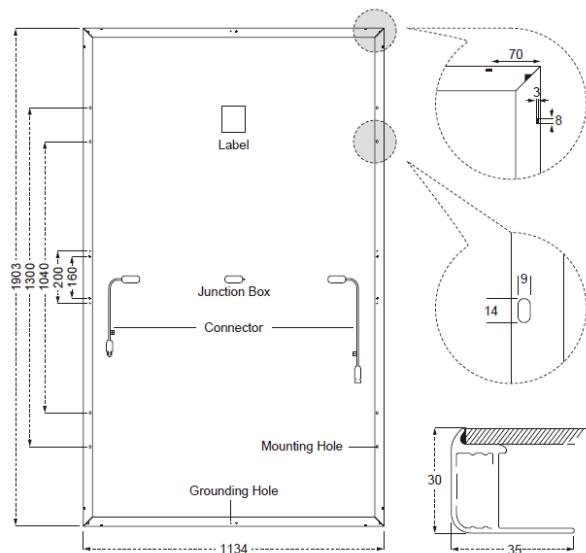Design**Operating Parameters**

Maximum system voltage	1500V DC
Operating Temperature	-40 ~ +85°C
Maximum series fuse rating	20A
Snow load, frontside/Wind load, backside	5400Pa/2400Pa
Nominal operating cell temperature	45°C±2°C
Application level	Class A

STC ----- Electrical Characteristics

Module Type	HSSP-T60X10/FS				
Maximum Power (Pmax/W)	450	455	460	465	470
Open-circuit Voltage (Voc/V)	62.0	62.2	62.4	62.6	62.8
Maximum Power Voltage (Vmpp/V)	52.4	52.6	52.8	53.0	53.2
Short-circuit Current (Isc/A)	9.19	9.25	9.31	9.37	9.43
Maximum Power Current (Imp/A)	8.59	8.65	8.71	8.77	8.83
Module Efficiency (%)	20.9	21.1	21.3	21.6	21.8

Power Tolerance: 0~+5W, Temperature Coefficient of Isc: 0.05%/°C, Temperature Coefficient of Voc: -0.31%/°C, Temperature Coefficient of Pmax: -0.35%/°C

Standard Test Environment : Irradiance 1000W/m², Cell temperature 25°C, Spectrum AM1.5

NOCT ----- Electrical Characteristics

Maximum Power (Pmax/W)	339	342	346	350	354
Open-circuit Voltage (Voc/V)	58.7	58.9	59.1	59.3	59.5
Maximum Power Voltage (Vmpp/V)	49.6	49.8	50.0	50.2	50.4
Short-circuit Current (Isc/A)	7.41	7.46	7.51	7.56	7.61
Maximum Power Current (Imp/A)	6.82	6.87	6.92	6.97	7.02

Standard Test Environment : Irradiance 800W/m², Ambient temperature 20°C, Spectrum AM1.5, Wind speed 1m/s

I-V Curve HSSP-T60X10/FS-465W